



ENIQUEST

Australian Made Diesel Generators



RANGER 11000

SINGLE PHASE DIESEL GENERATOR

ISO 9001 CERTIFIED

ENIQUEST
Australian Made Diesel Generators
Powered by
YANMAR



MADE IN AUSTRALIA

Worlds Best Small Diesel Generator

Extremely Compact | Clean Power | Highly Efficient | Better Motor Starting
Specially developed for portable power, pumping and a reliable back up for commercial and domestic solar

ENIQUEST

Australian Made Diesel Generators



Powered by

YANMAR

RANGER 11000

SINGLE PHASE DIESEL GENERATOR



Specifications

Please Note: Specifications are subject to change without notice


	Ranger 11000 1 Phase
Continuous Output	11 kVA 8.8kW
Output Voltage	240V 50Hz
Current @ 0.8pf	44A
Power Outlets	1x 15A 3 Pin GPO 1x 32A 3 Pin
Fuel Type	Automotive Diesel (Up to 5% Biodiesel Compatible)
Fuel Consumption	3.1L Per Hour @ Full Load
Fuel Tank Capacity	25L
Noise Full Load @ 7m	65dB(A)
Engine Make	Yanmar
Engine Model	3TNM68
Engine Displacement	0.784L
Engine Speed Control	Mechanical
Engine RPM	3000
No. of Cylinders	3
Cooling	Aluminium Radiator
Service Intervals	250 Hours
Alternator Model	RF2-17.5
Alternator Type	Permanent Magnet, Self Regulating (No AVR Required)
Number of Poles	2
Generator Controller	Eniquest PM330 with 2 Wire Remote Start & Engine Management
Dimensions L x W x H	1274 x 626 x 762
Weight	322kg

Features

- Extremely quiet running
- All powder coated aluminium enclosure
- Powdercoated, Zinc Rich primed steel base frame
- Very compact
- High quality components
- Pure sine wave voltage output
- Unsurpassed fuel economy
- Permanent magnet brushless alternator
- 300% starting capacity
- Self-regulates voltages- No AVR's
- Heavy duty robust construction
- All service points from one side
- World renowned Yanmar industrial engine
- PM330 controller with engine protection
- 2 Wire Auto Start
- Weatherproof RCD safety switches
- Suitable for vehicle mounting
- Fuel gauge at fill point
- High-crank sealed AGM battery
- Comprehensive range of options available
- 2 Years, 2,000 hour warranty

What makes the Ranger 11000 Diesel Generators a better choice?

The Ranger 11000 diesel generators are manufactured and hand built in Queensland using locally sourced components. It is the quietest, most fuel efficient and robust diesel generator available and has been developed specifically for reliable commercial and domestic power as well as solar backup. A focus on ease of maintenance, the modular construction offers complete access to all components and this is backed up by a complete stock of spares if ever required. With simplicity in mind, the alternator design uses no electronics to regulate voltages which is a common failpoint on most generators. The generator controller is designed by us and manufactured in Queensland, and is a simple yet powerful controller- solid state and draws absolutely no power when in standby mode. The Ranger 11000 has been engineered to suit the harsh conditions that Australia presents.

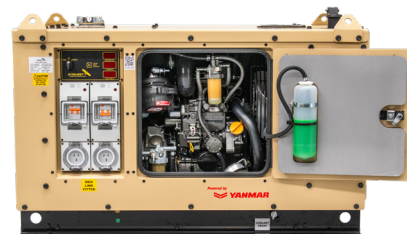

"At Eniquest, we believe that any diesel generator needs to be as reliable and durable as our military products. Our Ranger 11000 is all of this and more"

Select Your Options:



140L Bundled
Diesel Tank



Three Phase
Power



Lockable
Cabinet



Mine Spec



Additional
Outlets



E-Stop Button



Auxiliary Battery
Charging



Start Battery
Isolator



Time Clock or
Countdown
Timer Control

More options available!



Discover more and find your local dealer at
www.powerequipment.com.au
or call 1800 069 469