



# PowerTech 4045H Diesel Engine

Industrial Engine Specifications



4045H shown

## Dimensions

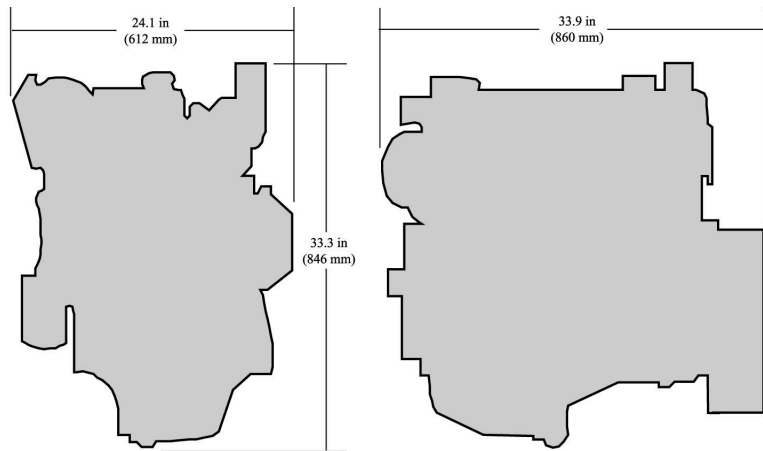

## Certifications

CARB

## General data

Model	4045HF150
Number of cylinders	4
Displacement - L (cu in)	4.5 (275)
Bore and Stroke-- mm (in)	106 x 127 (4.17 x 5.00)
Compression Ratio	17.0:1
Engine Type	In-line, 4-Cycle

Aspiration	Turbocharged and air-to-air aftercooled
Length - mm (in)	867 (34.1)
Width - mm (in)	612 (24.1)
Height-- mm (in)	1000 (39.4)
Weight, dry-- kg (lb)	396 (873)


Intermittent BHP is the power rating for variable speed and load applications where full power is required intermittently.

Heavy duty - see application ratings/definitions, engine performance curves.

Continuous BHP is the power rating for applications operating under a constant load and speed for long periods of time.

Power output is within + or - 5% at standard SAE J 1995 and ISO 3046.

## Performance curve

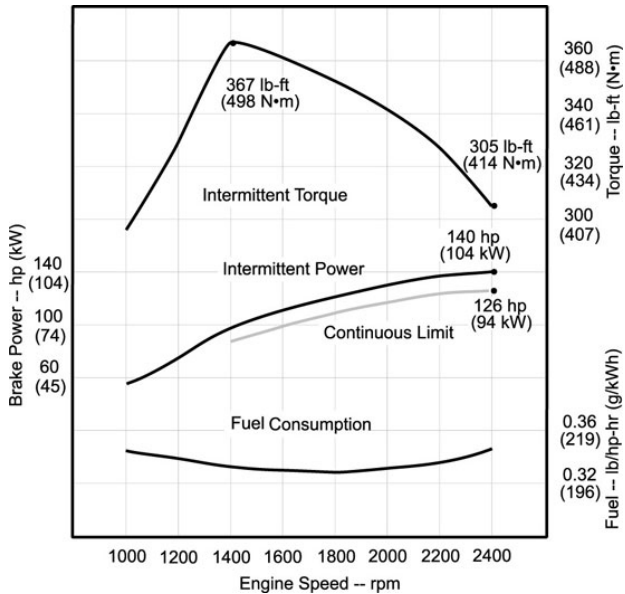

## Performance data

Intermittent rated speed	104 kW (139 hp) @ 2400 rpm
Peak power	104 kW (139 hp) @ 2400 rpm
Peak torque	498 N.m (367 ft-lb) @ 1400 rpm
Torque rise %	20% @ 1400 rpm

## Features and benefits

### Dynamically Balanced Crankshaft

- Crankshafts are formed from nodular iron

### Forged-Steel Connecting Rods

- Unique 45-degree design permits use of larger crankshaft connecting-rod bearings for increased durability

### Self-adjusting Poly-vee Fan Drive

- Self-adjusting, eight-groove, poly-vee fan drive provides multiple fan drive ratios and fan heights that can be matched to specific application requirements
- Poly-vee design provides more than twice the drive capacity of comparable vee-belts

### Replaceable Wet-Type Cylinder Liners

- Provides excellent heat dissipation
- Precision machined for long life

### Either-Side Service

- Engine installation and maintenance simplified and convenient by providing dipstick and oil filter options on both sides of the engine

### Standard Gear Auxiliary Drive

- Standard gear auxiliary drive produces up to 50 hp (37 kW) for gear-driven accessories

### Mounting Points

- Standard front and side mounting points provide easy installation and application flexibility

### Optional Engine-Balancer Shafts

- Provides smooth engine operation

**John Deere Power Systems**  
 3801 W. Ridgeway Ave.  
 PO Box 5100  
 Waterloo, IA 50704-5100  
 Phone: 1-800-533-6446  
 Fax: 319.292.5075

**John Deere Power Systems**  
**Usine de Saran**  
 La Foulonnerie - B.P. 11.13  
 45401 Fleury les Aubrais Cedex  
 France  
 Phone: 33.2.38.82.61.19  
 Fax: 33.2.38.82.60.00

*All values at rated speed and power with standard options unless otherwise noted. Specifications and design subject to change without notice.*